


Rated power: 2.05 MW
 Rotor diameter: 100 m
 Wind class: IEC 3a
 Drive train: LARUS Compact®

TAKE A LICENCE. >>>>

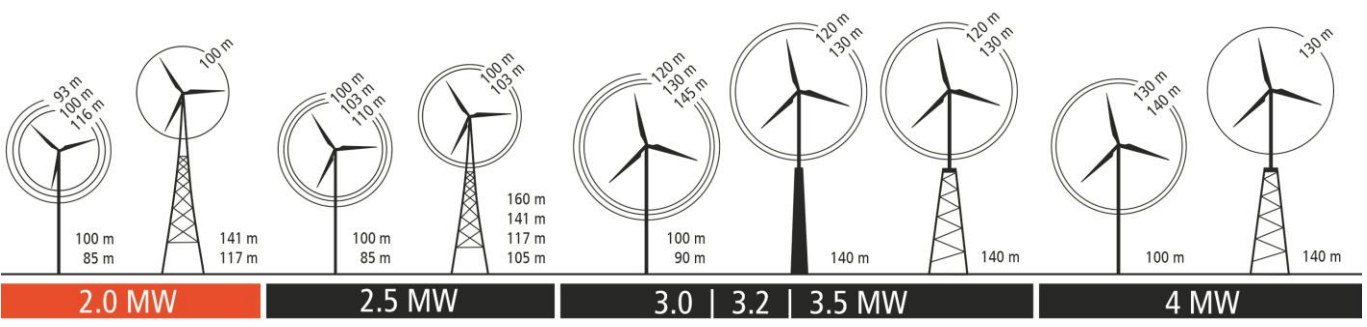

TECHNICAL DATA

Rated power	2.05 MW
Rotor	100 m
Wind class	IEC 3a
Cut-in wind speed	3.5 m/s
Rated wind speed	11.5 m/s
Cut-out wind speed	25.0 m/s
Capacity factor*	3,975 h, 45%
Sound power	105.8 dB(A)
Hub height tubular tower	85 m 100 m
Hub height lattice tower	117 m 141 m
Drive train concept - LARUS Compact®	Main gearbox in combination with torque bearing as a Plug & Play system
Electrical configuration	Double-fed induction generator, IGBT converter, 50 Hz, 60 Hz
Power control - LARUS Smart®	Triple independent pitch system
Safety system - LARUS Safe®	Matrix safety system


POWER CURVES*

V_{WIND} [m/s]	Power [kW]
3,5	26
4	55
5	207
6	410
7	689
8	1,044
9	1,459
10	1,828
11	2,000
12	2,049
13	2,050
14	2,050
25	2,050

ANNUAL YIELD*

V_{WIND} [m/s]
5.0
5.5
6.0
6.5
7.0
7.5

* Standard conditions and calculations acc. to IEC 614
Measured power curves on request

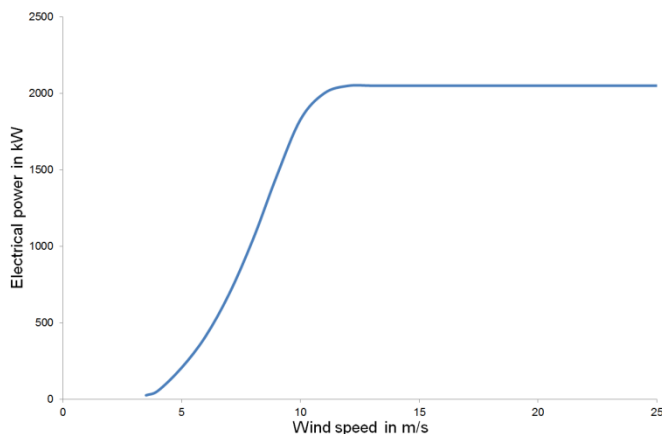

Editor:

W2E Wind to Energy GmbH
Grubenstraße 44
18055 Rostock | Germany
www.wind-to-energy.de